


COUDE FEMELLE 90 °

90° FEMALE ELBOW



klepp & Co
ARMATUREN

PE 3037

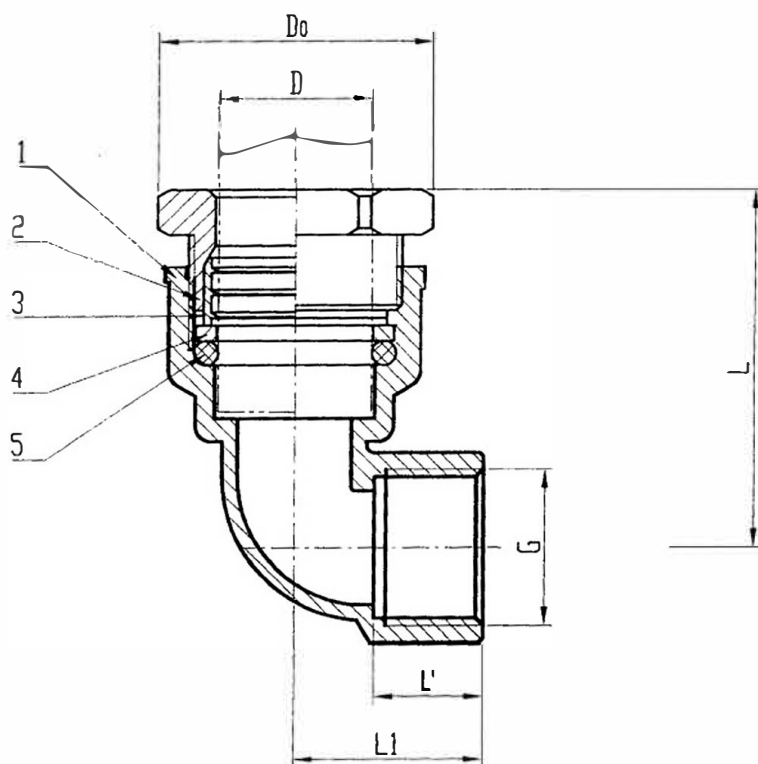

■ MATIÈRE ■ MATERIALS

DESCRIPTION	PART NAME	MATIÈRE	MATERIALS
1 Corps	Body	Laiton UNI 5075/65	Brass UNI 5075/65
2 Ecou	Nut	Laiton UNI 5075/65	Brass UNI 5075/65
3 Anneau de compression	Compressing ring	H62	H62
4 Rondelle	Washer	Laiton OT58	Brass OT58
5 O-ring	O-ring	NBR70	NBR70

■ CARACTÉRISTIQUES TECHNIQUES ET CONDITIONS D'UTILISATION

TARAUDAGE : ISO/R/7/1

TEMPÉRATURE DE SERVICE :

-20°C +100°C

PRESSION DE SERVICE :

PN 30 - Norme DIN 8076

■ INTRUCTIONS DE MONTAGE :

- S'assurer que l'écrou soit desserré de quelques tours.
- Enfoncer le tube coupé à angle droit jusqu'au fond du corps du raccord.
- Serrer l'écrou énergiquement.

■ TECHNICAL FEATURES AND USING CONDITIONS

THREADS : ISO/R/7/1

WORKING TEMPERATURE :

-20°C + 100°C

WORKING PRESSURE :

PN 30 - DIN 8076

■ ASSEMBLING INSTRUCTIONS :

- Ensure to unscrew the nut from the fitting only of a few threads.
- Insert the tube, cutted vertically, into the fitting by pressure in order to reach the seat of the fitting itself.
- Tight up the nut completely.

■ CERTIFICATIONS, NORMES, TESTS

ACS 00 ACC NY 013

■ CERTIFICATIONS, NORMES, TESTS

ACS 00 ACC NY 013

■ DONNÉES PRODUITS SPÉCIFIQUES À LA DIMENSION

■ ITEMS SPECIFIC CHARACTERISTICS FOR EACH DIMENSION

D	20	25	25	32	32	40	40	50	63	75
G	1/2"	1/2"	3/4"	3/4"	1"	1"	1"1/4	1"1/2	2"	2"1/2
Do	36	42	42	50	50	61	61	73	90	110
L	51	54	56	64	65	75	74	86,5	105	121
L1	25	26,5	30	30	34,5	36	41	44,5	50	64
Pièce par boîte / Packing each bag	10	10	10	8	8	5	4	-	-	-
Pièce par carton / Packing each carton	160	80	80	64	64	40	32	27	21	10
Poids pièce (grs) / Weigth piece (grs)	160	215	195	350	325	555	470	720	1290	2350