


TÉ MÂLE

MALE TE



klepp & Co
ARMATUREN

PE 3020

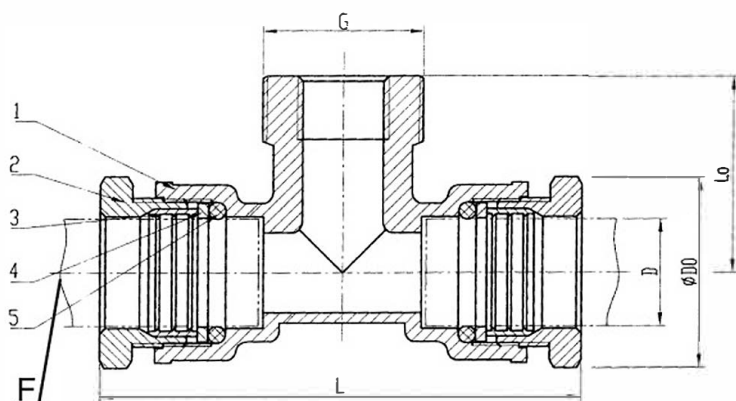

MATIÈRE MATERIALS

DESCRIPTION	PART NAME	MATIÈRE	MATERIALS
1 Corps	Body	Laiton UNI 5075/65	Brass UNI 5075/65
2 Ecou	Nut	Laiton UNI 5075/65	Brass UNI 5075/65
3 Anneau de compression	Compressing ring	H62	H62
4 Rondelle	Washer	Laiton OT58	Brass OT58
5 O-ring	O-ring	NBR-70	NBR-70

CARACTÉRISTIQUES TECHNIQUES ET CONDITIONS D'UTILISATION

TARAUDAGE : ISO/R/7/1

TEMPÉRATURE DE SERVICE :

-20°C +100°C

PRESSIION DE SERVICE :

PN 30 - Norme DIN 8076

INSTRUCTIONS DE MONTAGE :

- S'assurer que l'écrou soit desserré de quelques tours.
- Enfoncer le tube coupé à angle droit jusqu'au fond du corps du raccord.
- Serrer l'écrou énergiquement.

TECHNICAL FEATURES AND USING CONDITIONS

THREADS : ISO/R/7/1

WORKING TEMPERATURE :

-20°C + 100°C

WORKING PRESSURE :

PN 30 - DIN 8076

ASSEMBLING INSTRUCTIONS :

- Ensure to unscrew the nut from the fitting only of a few threads.
- Insert the tube, cutted vertically, into the fitting by pressure in order to reach the seat of the fitting itself.
- Tight up the nut completely.

CERTIFICATIONS, NORMES, TESTS

ACS 00 ACC NY 013

CERTIFICATIONS, NORMES, TESTS

ACS 00 ACC NY 013

DONNÉES PRODUITS SPÉCIFIQUES À LA DIMENSION

ITEMS SPECIFIC CHARACTERISTICS FOR EACH DIMENSION

	D	20	25	25	32	32	40	40	50	50	63	63	75	90
G	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/4	1 1/2	1 1/2	2	2 1/2	3	
F	3/8	3/8	1/2	1/2	3/4	3/4	1	1	1 1/4	1 1/4	1 1/2	2	2 1/2	
L	93	92	97	108	115	126	132	147	152	182	194	242	267	
Lo	33,5	35	37	41	44	49	51	57	57	65	68	84	95	
Do	36	38	42	47	50	58	61	69	73	85	90	110	127	
Pièce par boîte / Packing each bag	7	10	10	5	5	3	3	-	-	-	-	-	-	
Pièce par carton / Packing each carton	112	80	80	40	40	24	24	22	22	8	8	6	4	
Poids pièce (grs) / Weigh piece (grs)	230	340	305	570	475	890	805	1390	1040	2310	1855	3395	4580	