


The exclusive ownership of this drawing is of Eurotermo Srl and in no case does the recipient acquire any rights relating to it. The recipient of the drawing undertakes to maintain maximum confidentiality on the same and not to make any use of it, in whole or in part, that is not previously authorized in writing by Eurotermo Srl. The recipient also undertakes to impose and guarantee compliance with the aforementioned obligations to its employees and / or collaborators, including external ones, by responding to Eurotermo Srl of any violations on their part.

La titolarità esclusiva del presente disegno è di Eurotermo Srl ed in nessun caso il ricevente acquisisce alcun diritto relativamente al medesimo. Il ricevente si impegna a mantenere la massima riservatezza sul medesimo ed a non farne alcun uso, totale o parziale, che non sia previamente autorizzato per iscritto da Eurotermo Srl. Il ricevente s'impegna altresì ad imporre e garantire il rispetto delle suddette obbligazioni ai propri dipendenti e/o collaboratori, anche esterni, rispondendo nei confronti di Eurotermo Srl di eventuali violazioni da parte loro.

1	2	3	4
Normative / Stds reference UNI EN 13828:2004		Condizioni di utilizzo / Terms of Use	
Compatibilità / Compatibility UBA list		Acqua-vapore acqueo Pressione massima 10bar Temperatura massima in continuo 120°C Temperatura di picco 150°C Temperatura minima -15°C No SHOCK termico Funzionalità garantita solo a valvola aperta o chiusa, non parzialmente aperta o chiusa	Water-water vapor Maximum pressure 10bar Maximum temperature in continuous 120°C Peak temperature 150°C Minimum temperature -15°C No thermal SHOCK Functionality is guaranteed only with open or closed valve, not partially open or closed
Certificazioni / Homologations -			

MARCATURA SUL LATO OPPOSTO
MARKING ON OPPOSITE SIDE

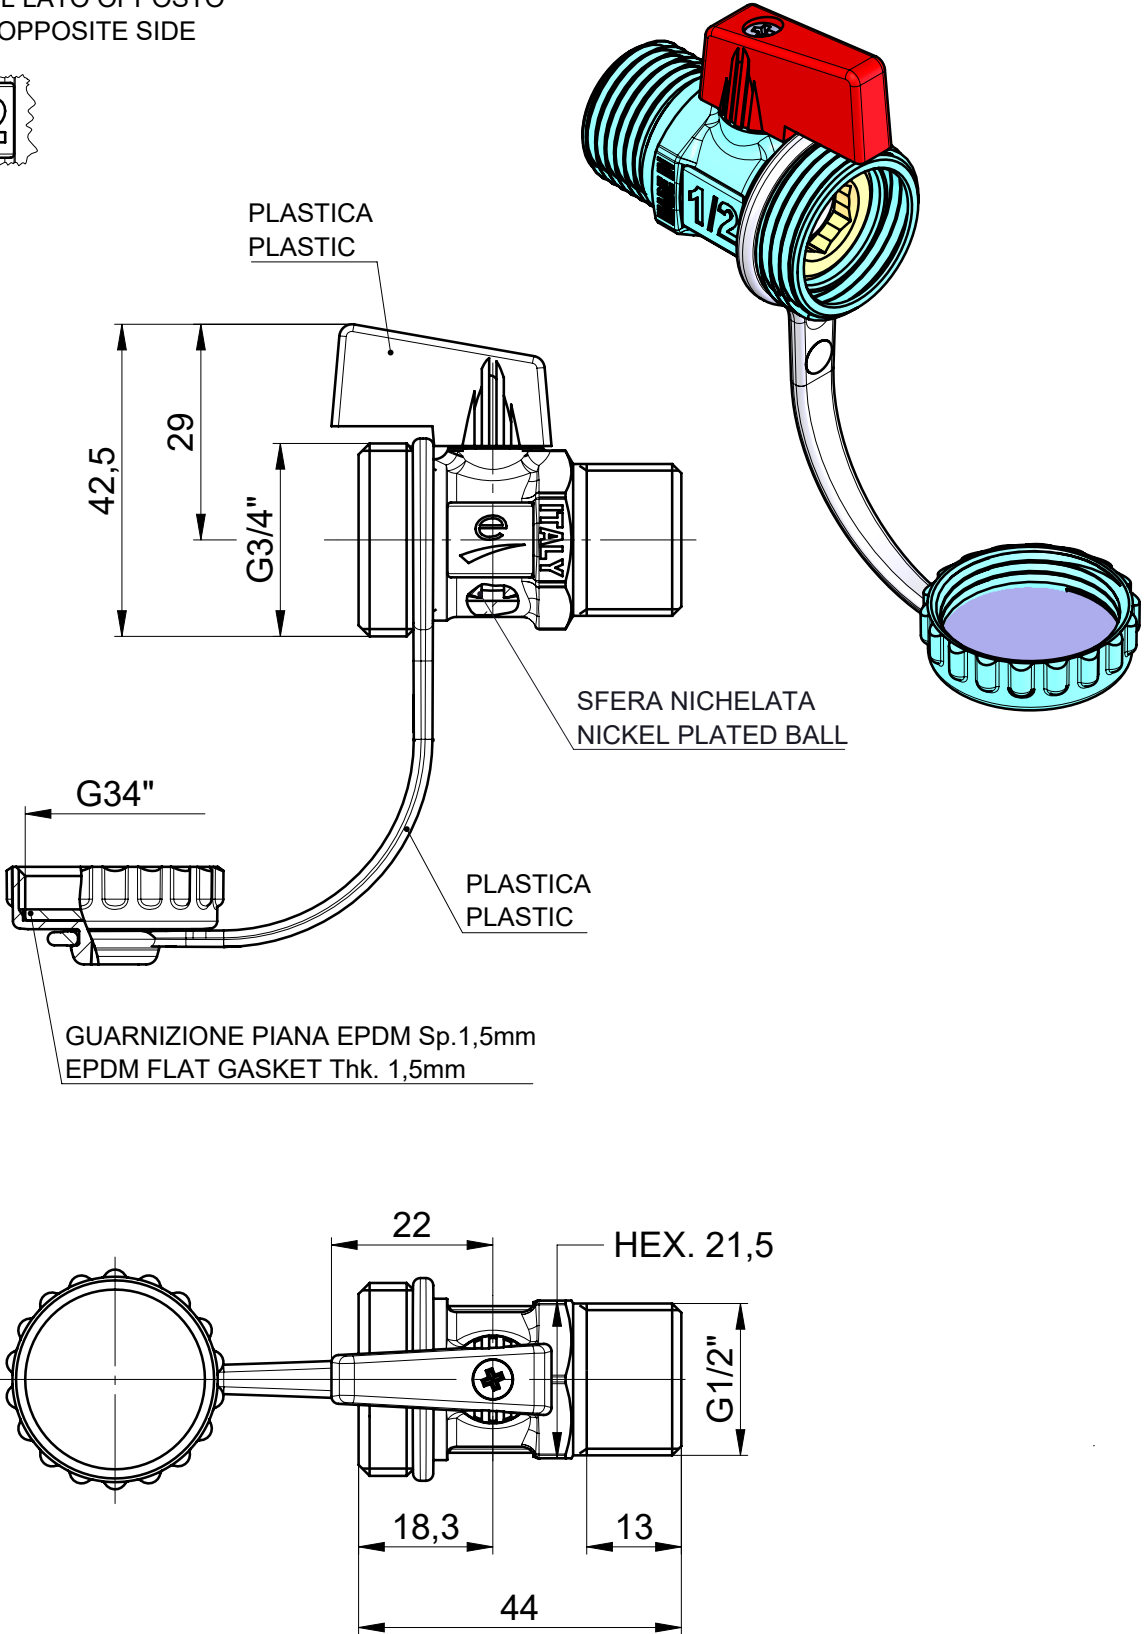

 NUM.DIS/DRAW.-NR. ALKFEOSOG	DISEGNATO/DRAWN S.Murari	DATA/DATE 07/07/2025	APPROVATO/CHECKED M.S.	DATA/DATE 07/07/2025	SCALA/SCALE 1:1	FORMAT A4 Datasheet
	MATERIALE BASE/BASE MATERIAL UNI EN 12165 CW617N-DW		ASPETTO / APPEARANCE NICHELATO SABBATO / NICKEL PLATED SANDBLATED			
	TENUTA SFERA/SPHERE SEAL VIRGIN PTFE gasket/guarnizione in PTFE VERGINE		TENUTA ASTA/SPINDLE SEAL EPDM 70ShA O-ring			
	DESCRIZIONE/DESCRIPTION VALVOLA A SFERA "ALFEO" DN10 G1/2"M x G3/4"M CON TAPPO, LV ROSSA BALL VALVE "ALFEO" DN10 G1/2"M x G3/4"M WITH CAP, RED HANDLE					